

Free Questions for 350-901 by dumpssheet

Shared by Page on 22-07-2024

For More Free Questions and Preparation Resources

Check the Links on Last Page

Question 1

Question Type: MultipleChoice

A developer creates an application for a Cisco Catalyst 9000 switch in a Docker container. Which action must be taken to host the application on the switch?

Options:

- A- Copy the application code to a NETCONF file and upload the file to the switch
- B- Connect the switch to Cisco DNA Center and push the application through the platform.
- C- Use the Cisco IOxClient tool to export the application to a ZIP file and push the file to the switch
- D- Export the application as a TAR file and import the file to the switch

Answer:

D

Question 2

Question Type: DragDrop

Drag and drop the code from the bottom onto the box where the code is missing to enable an SSID by using the Cisco Meraki Dashboard API. Not all options are used.

import requests				
import json				
DASHBOARD_HOST = 'https://api.meral API_KEY = '345ed8d63e19179cf88a100	:i.com			
Answer:	0C218U3618Q312345			
url = '{}/api/y0/	/L_6468294964811054	133/		
network:	/1'.format (DASHBOARD_HOST)			
payload = {				
Question 3	_			
'Content-Type': 'application/ja Question Type: MultipleChoice	on',			
Which approach is used to protect	(url, headers=he	aders,		
put post	put			
ssids networks	networks			
'X-Cisco-Meraki-API-Key': API_KEY	'X-Cisco-Meraki-API-Key': API_KEY			
Options:				

- A- Use encryption between services
- B- Install a perimeter firewall
- C- Use a dedicated cloud connection service.
- D- Implement an API gateway

Answer:
A
Question 4
Question Type: MultipleChoice
How should logs for an application be created?
Options:
A- Use a standard and easily configurable logging framework.
B- Use fault-tolerant protocols.
C- Monitor for backlogs and outages.
D- Filter sensitive data before transmitting logs.

Answer:

Α


Question 5

Question Type: DragDrop

Drag and drop the code from the bottom onto the box where the code is missing to delete a host object by using the Cisco Firepower Device Manager API Not all options are used.



Refer to the exhibit.

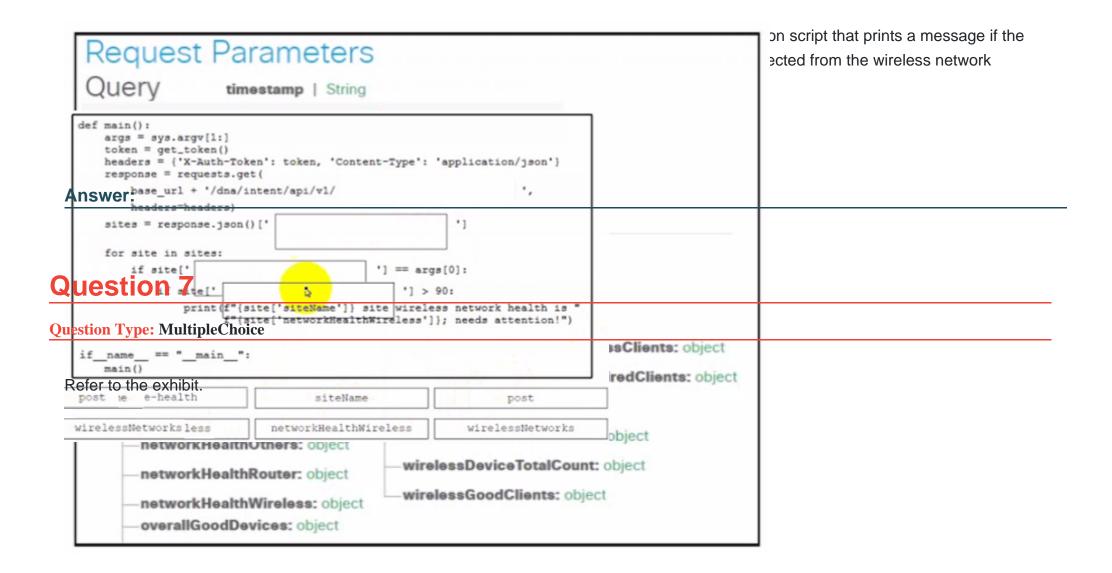

```
import requests
import json

BASE_URL = 'https://api.meraki.com/api/v0'
API_KEY = '6bec40cf957de430a6f1f2baa056b99a4fac8fa0'

headers = {
    'Content-Type': 'application/json',
    'X-Cisco-Meraki-API-Key': API_KEY

url = f'{BASE_URL}/organizations/2930418/networks'
network_response = requests.get(url, headers=headers)

if network_response.status_code == 200:
    for network in network_response.json():

url = f'{BASE_URL}/networks/{network["id"]}/clients'
    clients_response = requests.get(url, headers=headers)

if clients_response.status_code == 200:
    print(clients_response.decode("utf-8"))
```

One part of an application routinely uses the Cisco Meraki API to collate data about all clients Other parts of the application also use the Meraki API, but a single API key is used within the application The organization has approximately 4.000 clients across 30 networks Some of the application users report poor performance and missing dat

a. Which two changes improve the performance of the application? (Choose two.)

Options:

A- Check for HTTP code 429 and wait until Retry-After time before further calls are made

- B- Configure multiple API keys in the application and rotate usage of each one.
- **C-** Use random values in the User-Agent header when HTTP calls are made.
- D- Use fewer API calls to create a more efficient endpoint.
- E- Check API response payloads for later reuse in real time during code execution.

Answer:

A, B

To Get Premium Files for 350-901 Visit

https://www.p2pexams.com/products/350-901

For More Free Questions Visit

https://www.p2pexams.com/cisco/pdf/350-901

