



Free Questions for DES-5221 by ebraindumps

Shared by Dale on 24-05-2024

For More Free Questions and Preparation Resources

Check the Links on Last Page

Question 1

Question Type: MultipleChoice

When using Policy Based Routing what is a valid matching criterion?

Options:

- A- 802.1Q VLAN ID
- B- Destination TCP port number
- C- AAA security credentials
- D- Source hostname

Answer:

B

Question 2

Question Type: MultipleChoice

There is a spanning tree mismatch at the global level. PVST+ is configured on a VLT peer. All VLT port channels go down on both VLT peers. A syslog error message is generated. What is the correct action to resolve the issue?

Options:

- A- Verify the VLT LAG ID is configured correctly on both VLT peers.
- B- Enable RSTP on both VLT peers.
- C- Use the show VLT detail and show VLT brief commands to view the VLT port channel status information.
- D- Perform a mismatch check after the VLT peer is established.

Answer:

D

Explanation:

https://www.dell.com/support/manuals/us/en/04/poweredge-fx2/dell%20fn%20ioa%20config_9.8.0.0_pub-v1/troubleshooting-vlt?guid=guid-9978ac1f-1305-4590-9c64-bb35bd6e012a&lang=en-us

Question 3

Question Type: MultipleChoice

The network administrator wants to configure RADIUS authentication for VTY access, and for console access to use the local configuration. Which two commands should be used to achieve this goal?

Options:

- A- aaa authentication login vty group radius aaa authentication login console local
- B- aaa authentication login default group radius aaa authentication login console local
- C- aaa authentication login vty radius
aaa authentication login console group local
- D- aaa authentication login default group radius aaa authentication login console group local


Answer:

B

Question 4

Question Type: MultipleChoice

Refer to the exhibit.

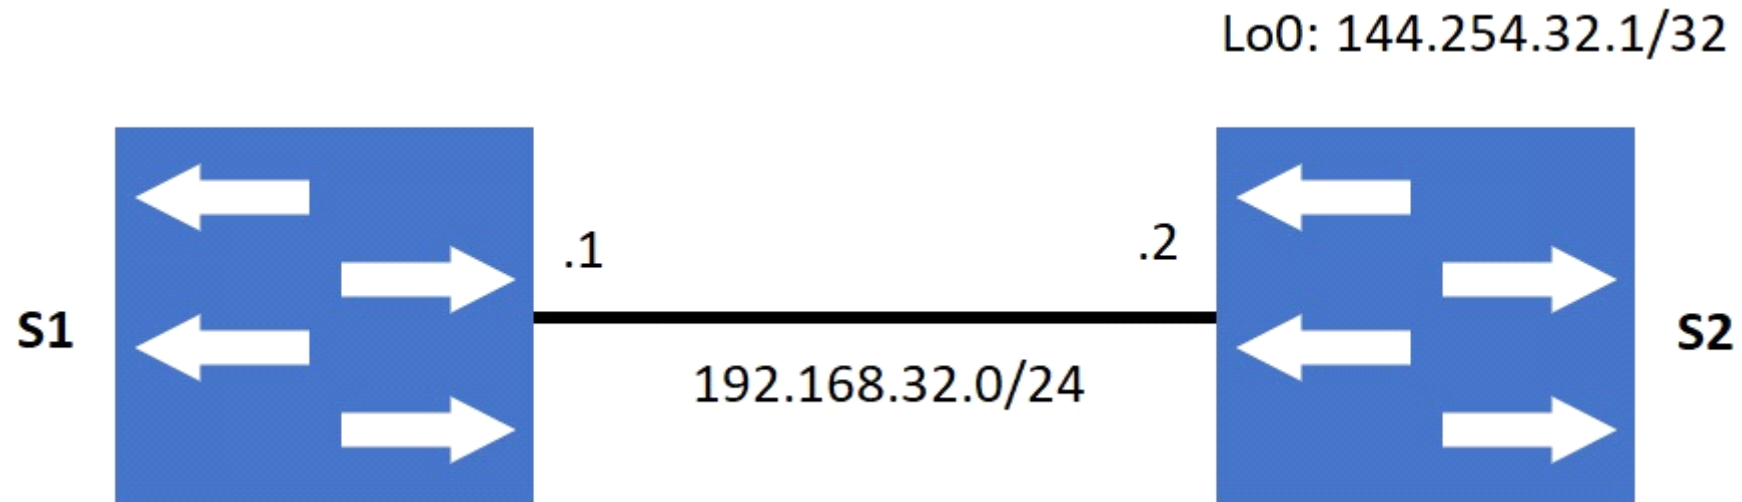

Which configuration will allow S1 to ping S2's Lo0 address?

Options:

- A- S1(config-router)# ip route 144.254.32.1 192.168.32.2/32
- B- S1(config-router)# ip route 192.168.32.2 144.254.32.1/32
- C- S1(config)# ip route 144.254.32.1/32 192.168.32.2
- D- S1(config)# ip route 192.168.32.2 144.254.32.1/32

Answer:

C

Question 5

Question Type: MultipleChoice

A network administrator is designing a Layer 2 topology and requires separate spanning-tree roots to avoid having a given port blocked for all instances. Which spanning-tree protocols will meet this need?

Options:

A- STP & RSTP

B- RSTP-PV & MSTP

C- STP & RSTP-PV

D- RSTP & MSTP

Answer:

B

Question 6

Question Type: MultipleChoice

Using the MAC 8c-ec-4b-5b-61-9d, what is a valid EUI-64 link local address?

Options:

- A- 2001::a9:8eec:4bff:fc5b:619d
- B- fe80::a9:8cec:4bff:fe5b:619d
- C- ff80:a9:8eec:4bff:fe5b:619d
- D- fe80::a9:8eec:4bff:fe5b:619d

Answer:

B

To Get Premium Files for DES-5221 Visit

<https://www.p2pexams.com/products/des-5221>

For More Free Questions Visit

<https://www.p2pexams.com/dell-emc/pdf/des-5221>

