



Free Questions for 300-635 by certsinside

Shared by Riley on 24-05-2024

For More Free Questions and Preparation Resources

Check the Links on Last Page

Question 1

Question Type: MultipleChoice

Recheck the question

Which two terms are types of application isolation options available when Kubernetes is deployed with the SCCM plugin? (Choose two)

Options:

- A- VM Isolation
- B- Cluster Isolation
- C- Server Isolation
- D- Process Isolation
- E- Namespace Isolation


Answer:

B, E

Question 2

Question Type: MultipleChoice

Refer to the exhibit.

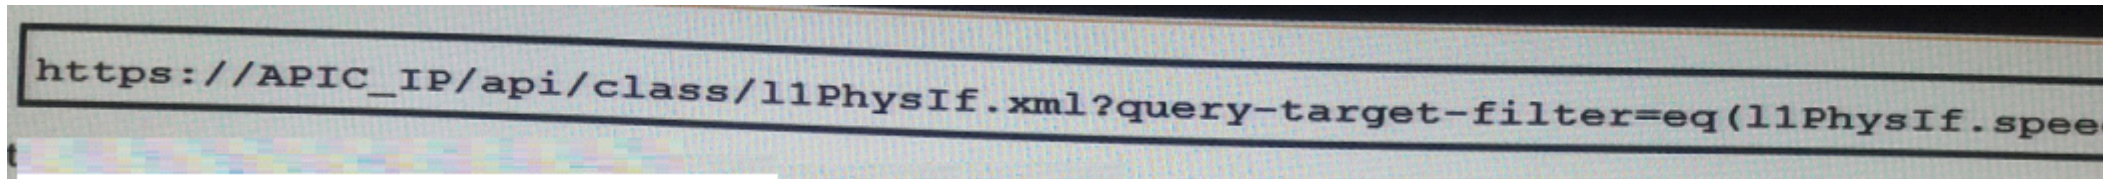

```
https://APIC_IP/api/class/l1PhysIf.xml?query-target-filter=eq(l1PhysIf.speed
```

Which two statements are true about this API GET request to the ACI APIC? (Choose two.)

Options:

- A-** The API call creates a new 10G interface in the APIC
- B-** The API call reads information from a managed object.
- C-** The API response is encoded in JSON
- D-** The API call reads information from an object class
- E-** The API response is encoded in XML

Answer:

D, E

Question 3

Question Type: MultipleChoice

Refer to the exhibit:

```
import requests

USER = "admin"
PASS = "password"
APIC = 'https://apic.supereats.com/'

OPERATION = 'api/aaaLogin.json'
DATA = {"aaaUser": {"attributes": {"name":USER, "pwd":PASS}}}
RESPONSE = requests.post(APIC+OPERATION, json=DATA, verify=False)

TOKEN = RESPONSE.json()["imdata"][0]["aaaLogin"]["attributes"]["token"]
COOKIE = {'APIC-cookie': TOKEN}

OPERATION = 'api/aaaLogout.json'
DATA = {
    "aaaLogout": {
        "attributes": {
            "token":TOKEN
        }
    }
}
RESPONSE = requests.post(APIC+OPERATION, json=DATA, cookies=COOKIE, verify=False)
```

Refer to the exhibit: Which Python snippets create an application policy named OrderProcess that contains two application endpoint groups under Tenant SuperEats using direct calls to the ACI REST API? Assume that authentication and library imports are correct


```
OPERATION = 'api/node/mo/uni.json'
DATA = {
  "FVTenant": {"attributes": {"name": "SuperEats"},
  "children": [{"FVAp": {"attributes": {"name": "OrderProcess"},
    "children": [
      {"FVAEPg": {"attributes": {"name": "app"}}},
      {"FVAEPg": {"attributes": {"name": "web"}}}
    ]}
  ]}
}
RESPONSE = requests.post(APIC+OPERATION, json=DATA, cookies=COOKIE)
```

```
OPERATION = 'api/node/mo/uni.json'
DATA = {
  "fvTenant": {"attributes": {"name": "SuperEats"},
  "children": [{"fvAp": {"attributes": {"name": "OrderProcess"},
    "children": [
      {"fvAEPg": {"attributes": {"name": "app"}}},
      {"fvAEPg": {"attributes": {"name": "web"}}}
    ]}
  ]}
}
RESPONSE = requests.get(APIC+OPERATION, cookies=COOKIE)
```

```
OPERATION = 'api/node/mo/uni.json'
DATA = {
  "fvTenant": {"attributes": {"rn": "SuperEats"},
  "children": [{"fvAp": {"attributes": {"rn": "OrderProcess"},
    "children": [
      {"fvAEPg": {"attributes": {"rn": "app"}}},
      {"fvAEPg": {"attributes": {"rn": "web"}}}
    ]}
  ]}
}
RESPONSE = requests.post(APIC+OPERATION, json=DATA, cookies=COOKIE)
```

```
OPERATION = 'api/node/mo/uni.json'
DATA = {
  "fvTenant": {"attributes": {"name": "SuperEats"},
  "children": [{"fvAp": {"attributes": {"name": "OrderProcess"},
```

Options:

A- Option

B- Option

C- Option

D- Option

Answer:

D

Question 4

Question Type: MultipleChoice

What are two capabilities of the DCNM REST API? (Choose two.)

Options:

- A-** uses the dcnm-token header for requests authentication after initial basic authentication
- B-** uses basic authentication without encoding for username and password
- C-** supports HTTP until release 11.0
- D-** uses bearer key authorization
- E-** is separated into Classic LAN, LAN Fabric, Media Controller, and SAN Management categories.

Answer:

A, E

Explanation:

Check for /rest/logon

Question 5

Question Type: DragDrop

After a Cisco Nexus switch interface is enabled and in the up state, an engineer must automate the configuration of the interface descriptions using the EEM Python Module.

Drag and drop the steps the engineer must take from the left into the correct order on the right.


| | |
|--|--------|
| event syslog pattern "IF_UP" | step 1 |
| exit | step 2 |
| event manager applet link monitor | step 3 |
| conf t | step 4 |
| action 1 cli command "source cdp_description.py" ' | step 5 |

Answer:

Question 6

Question Type: MultipleChoice

Exhibit:

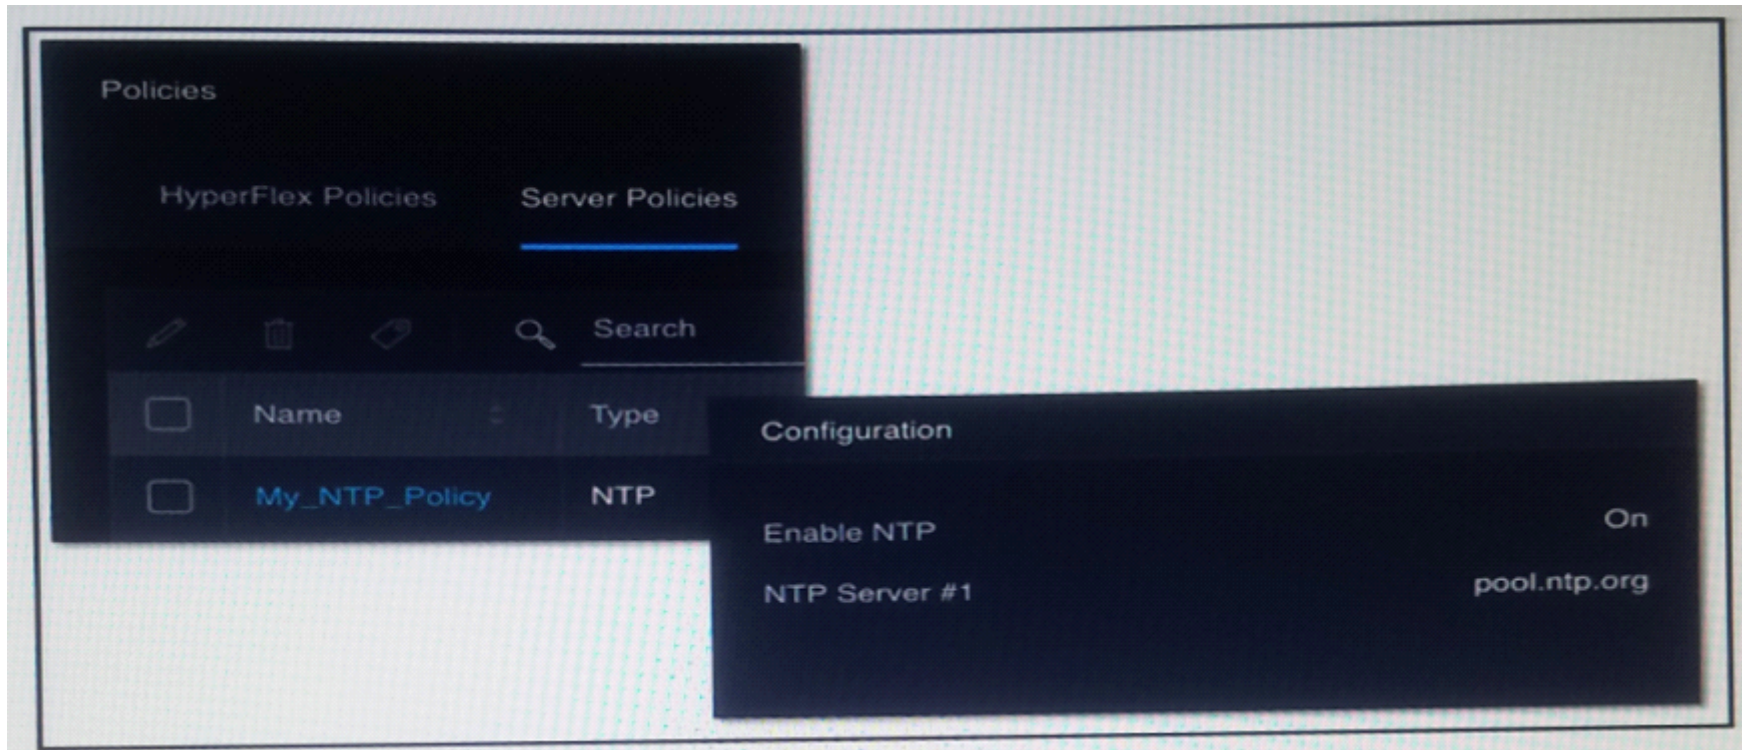

Refer to the exhibit. Cisco Intersight has an NTP server policy called My_NTP_Policy configured that contains a single NTP server pool entry "pool.ntp". Which Cisco Intersight API call adds an additional NTP server (10.20.0.1) to the My_NTP_Policy server policy?

- HTTP POST Method
URL: `https://intersight.com/api/v1/ntp/Policies/`
Bodytext:

```
{  
  "NtpServers": "10.20.0.1"  
}
```
- HTTP PATCH Method
URL: `https://intersight.com/api/v1/ntp/Policies/{My_NTP_Policy MOID}`
Bodytext:

```
{  
  "NtpServers": [  
    "pool.ntp.org",  
    "10.20.0.1"  
  ]  
}
```
- HTTP PUT Method
URL: `https://intersight.com/api/v1/ntp/Policies/`
Bodytext:

```
{  
  "NtpServers": [  
    "10.20.0.1"  
  ]  
}
```
- HTTP PATCH Method
URL: `https://intersight.com/api/v1/ntp/Policies/{My_NTP_Policy MOID}`
Bodytext:

```
{  
  "NtpServers": "10.20.0.1"  
}
```

Options:

A- Option

B- Option

C- Option

D- Option

Answer:

B

Question 7

Question Type: MultipleChoice

Which step must be taken to enable the REST API browser within Cisco UCS Director?

Options:

A- Edit the user profile and enable developer options.

B- Raise a case with TAC

C- The REST API browser is automatically enabled in Cisco UCS Director when a Power User is created.

D- Log in as the user 'REST'

Answer:

A

Question 8

Question Type: MultipleChoice

How is an ACI class name composed?

Options:

A- Method

B- ClassName: Method

C- Package:ClassName

D- MitName: Method

Answer:

C

To Get Premium Files for 300-635 Visit

<https://www.p2pexams.com/products/300-635>

For More Free Questions Visit

<https://www.p2pexams.com/cisco/pdf/300-635>

