

# Free Questions for 300-715 by actualtestdumps

Shared by Castillo on 24-05-2024

For More Free Questions and Preparation Resources

**Check the Links on Last Page** 

### **Question 1**

#### **Question Type:** MultipleChoice

Which statement is not correct about the Cisco ISE Monitoring node?

### **Options:**

- A) The local collector agent collects logs locally from itself and from any NAD that is configured to send logs to the Policy Service node.
- B) Cisco ISE supports distributed log collection across all nodes to optimize local data collection, aggregation, and centralized correlation and storage.
- C) The local collector agent process runs only the Inline Posture node.
- D) The local collector buffers transport the collected data to designated Cisco ISE Monitoring nodes as syslog; once Monitoring nodes are globally defined via Administration, ISE nodes automatically send logs to one or both of the configured Monitoring nodes.

#### **Answer:**

С

### **Question 2**

uestion Type: MultipleChoice
The profiling data from network access devices is sent to which Cisco ISE node?
Options:
A) Monitoring node
B) Administration node
C) Inline Posture node
D) Policy Service node
Answer:

# **Question 3**

D

**Question Type:** MultipleChoice

Which types of design are required in the Cisco ISE ATP program?

O	nti	OI	าร:
$\mathbf{}$			

- A) schematic and detailed
- B) preliminary and final
- C) high-level and low-level designs
- D) top down and bottom up

### **Answer:**

C

### **Question 4**

**Question Type:** MultipleChoice

What are the three default behaviors of Cisco ISE with respect to authentication, when a user connects to a switch that is configured for 802.1X, MAB, and WebAuth? (Choose three)

### **Options:**

A) MAB traffic uses internal endpoints for retrieving identity.

- B) Dot1X traffic uses a user-defined identity store for retrieving identity.
- C) Unmatched traffic is allowed on the network.
- D) Unmatched traffic is dropped because of the Reject/Reject/Drop action that is configured under Options.
- E) Dot1x traffic uses internal users for retrieving identity.

#### **Answer:**

A, B, D

# **Question 5**

**Question Type:** MultipleChoice

In which scenario does Cisco ISE allocate an Advanced license?

### **Options:**

- A) guest services with dACL enforcement
- B) endpoint authorization using SGA enforcement
- C) dynamic device profiling

D) high availability Administrator nodes	
Answer:	
В	
Question 6	
Question Type: MultipleChoice	
Which Cisco ISE node does not support automatic failover?	
Options:	
A) Inline Posture node	
B) Monitoring node	
C) Policy Services node	
D) Admin node	
Answer:	

# **Question 7**

**Question Type:** MultipleChoice

Which scenario does not support Cisco ISE guest services?

### **Options:**

- A) wired NAD with local WebAuth
- B) wireless LAN controller with central WebAuth
- C) wireless LAN controller with local WebAuth
- D) wired NAD with central WebAuth

#### **Answer:**

Α

# **Question 8**

Question Type: MultipleCh	hoice	oleC	ultip	I	Cype:	T	<b>Duestion</b>	0
---------------------------	-------	------	-------	---	-------	---	-----------------	---

By default, which traffic does an 802.IX-enabled switch allow before authentication?

### **Options:**

- A) all traffic
- B) no traffic
- C) traffic permitted in the port dACL on Cisco ISE
- D) traffic permitted in the default ACL on the switch

### **Answer:**

В

## **Question 9**

**Question Type:** MultipleChoice

What does MAB leverage a MAC address for?

A) Calling-Station-ID	
B) password	
C) cisco-av-pair	
D) username	
Answer:	
D	
Question 10	
Question Type: MultipleChoice	
Question Type: MultipleChoice	
Question Type: MultipleChoice	
Question Type: MultipleChoice  Which three conditions can be used for posture checking? (Choose three.)  Options:	

- B) operating system
- C) file
- D) application
- E) services

#### **Answer:**


C, D, E

# **Question 11**


### **Question Type:** MultipleChoice

An administrator is creating a new TACACS sell. The users that get assigned this profile should have initial access privileges equivalent to user EXEC mode, and a max privilege level of privileged EXEC mode. How is this configured?

A)



B)

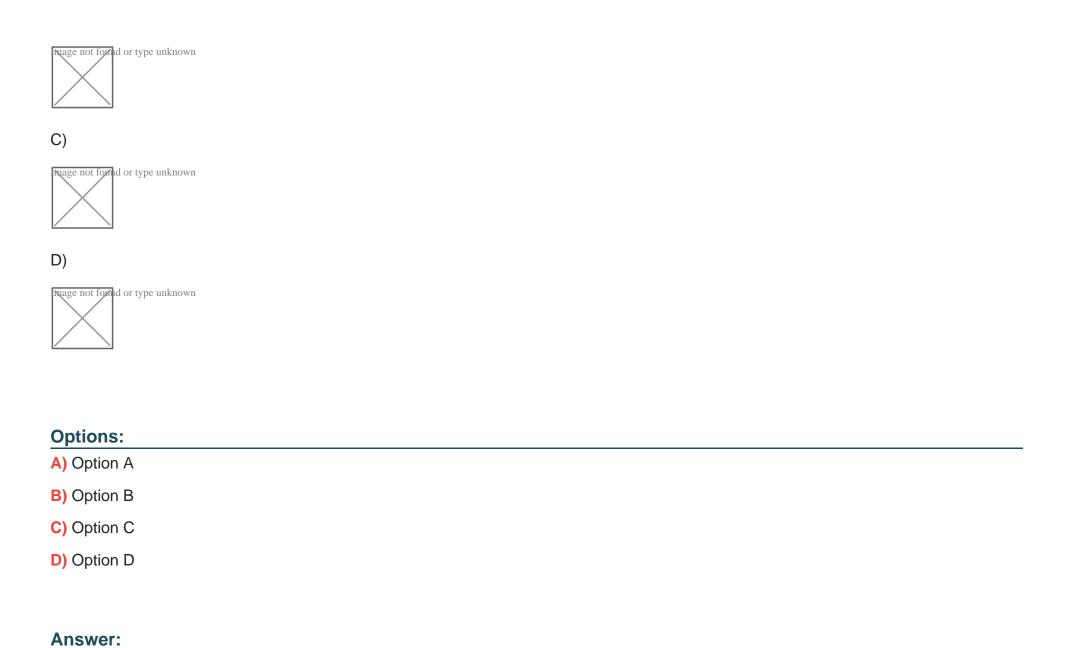

В

### To Get Premium Files for 300-715 Visit

https://www.p2pexams.com/products/300-715

### **For More Free Questions Visit**

https://www.p2pexams.com/cisco/pdf/300-715

