Free Questions for 300-735 by dumpshq

Shared by Callahan on 22-07-2024

For More Free Questions and Preparation Resources

Check the Links on Last Page

Question 1

Drag and drop the items to complete the ThreatGRID API call to return a curated feed of sinkholed-ip-dns in stix format. Not all options are used.

	https://panacea.threatgrid.com/api/v3/
	/	?api_key=[API_KEY]

Answer:

Explanation:

https://www.ciscolive.com/c/dam/r/ciscolive/emea/docs/2019/pdf/DEVNET-2164.pdf

sinkholed-ip-dns		sinkholed-ip-dns
search	s	search
GET	-dns.stix	GET

Question 2

Drag and drop the code to complete the curl command to query the Cisco Umbrella Investigate API for the umbrella popularity list. Not all options are used.

```
curl -H "Authorization: [          ] %YourToken%"
"https://investigate.api.umbrella.com/[          ]"
```

Answer:

topmillion	undred	Basic	topmillion

Explanation

https://docs.umbrella.com/investigate-api/reference

topthousand	Bearer	topthousand

Question 3

Question Type: MultipleChoice

Which snippet is used to create an object for network 10.0.69.0/24 using Cisco Firepower Management Center REST APIs?

A)

- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/networks

- METHOD:
POST

- INPUT JSON:

```
{
  "type": "Network",
  "value": "10.0.69.0/24",
  "overridable": false,
  "description": " ",
  "name": "Branch_1_net"
}
```

B)

- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/networkgroups

- METHOD:
PUT

- INPUT JSON:
```
{
  "type": "Network",
  "value": "10.0.69.0/24",
  "overridable": false,
  "description": " ",
  "name": "Branch_1_net"
}
```

C)

```
- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/networkgroups

- METHOD:
POST

- INPUT JSON:
{
  "type": "Network",
  "value": "10.0.69.0/24",
  "overridable": false,
  "description": " "
}
```

D)

```
- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/networks

- METHOD:
POST

- INPUT JSON:
{
  "type": "Network",
  "value": "10.0.69.0/24",
  "overridable": false,
  "description": " "
}
```

Options:

A- Option A

B- Option B

C- Option C

D- Option D

Answer:

A

Question 4

When the URI "/api/fmc_config/v1/domain/e276abec-e0f2-11e3-8169-6d9ed49b625f/policy/accesspolicies" is used to make a POST request, what does "e276abec-e0f2-11e3-8169-6d9ed49b625f" represent?

Options:

A- API token

B- domain UUID

C- access policy UUID

D- object UUID

Answer:

B

Question 5

Drag and drop the code to complete the curl query to the Umbrella Reporting API that provides a detailed report of blocked security activity events from the organization with an organizationId of "12345678" for the last 24 hours. Not all options are used.

```
curl --include --header "Authorization: Basic %base64string%"
https://reports.api.umbrella.com/v1/  [          ]  /
```

Answer:

[   ] / [   ]

Explanation:

security-activity		security-activity

https://docs.umbrella.com/umbrella-api/docs/security-activity-report

organizations	events	organizations

security-events	d	security-events

Question 6

What are two advantages of Python virtual environments? (Choose two.)

Options:

A- Virtual environments can move compiled modules between different platforms.

B- Virtual environments permit non-administrative users to install packages.

C- The application code is run in an environment that is destroyed upon exit.

D- Virtual environments allow for stateful high availability.

E- Virtual environments prevent packaging conflicts between multiple Python projects.
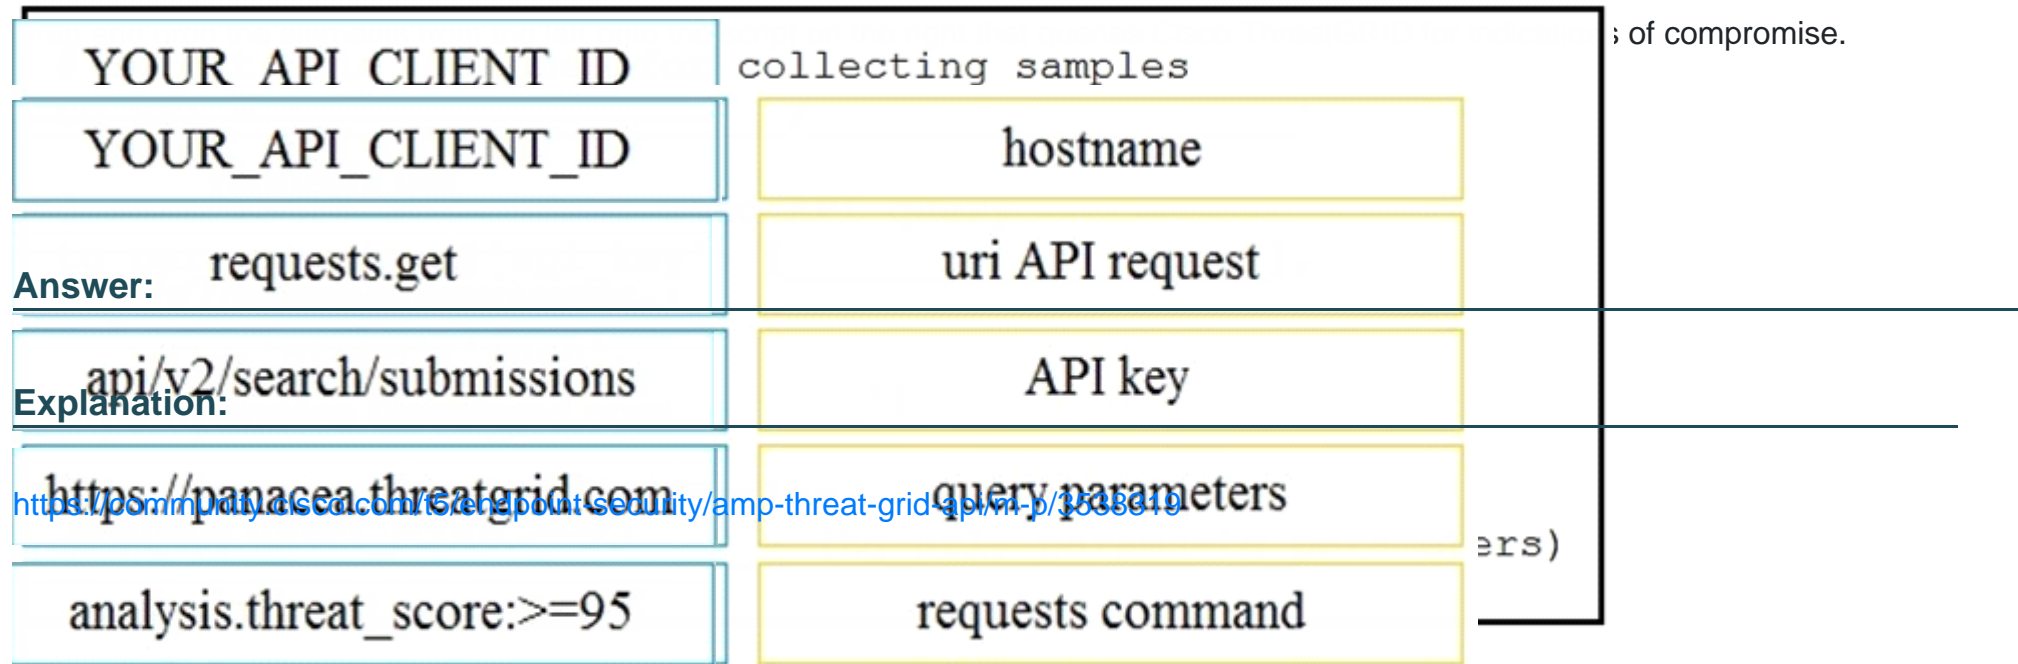
Answer:

C, E

Question 7

Question Type: DragDrop

Refer to the exhibit.

YOUR_API_CLIENT_ID		collecting samples	
YOUR_API_CLIENT_ID		hostname	
requests.get		uri API request	
api/v2/search/submissions		API key	
https://panacea.threatgrid.com		query parameters	
analysis.threat_score:>=95		requests command	

s of compromise.

Answer:

Explanation:

https://community.cisco.com/t5/endpoint-security/amp-threat-grid-api/m-p/3658919

ers)

Question 8

Refer to the exhibit.

```
quiz = [
    {
        "question": "Which of these is an IEEE standard for port-based Network Access Control",
        "choices": {"a": "802.11x", "b": "802.1x", "c": "802.11a", "d": "802.11b"},
        "answer": "b"
    },
]
```

Which expression prints the text "802.1x"?

Options:

A- print(quiz[0]['choices']['b'])

B- print(quiz['choices']['b'])

C- print(quiz[0]['choices']['b']['802.1x'])

D- print(quiz[0]['Question:']['choices']['b'])

Answer:

A

Question 9

Refer to the exhibit.

```
import json
import requests

USER = "admin"
PASS = "C1sco12345"
TENAT_ID = "132"
BASE_URL = "https://198.18.128.136"
CREDENTIALS = {'password': PASS, 'username': USER}

session = requests.Session()
session.post(BASE_URL+"/token/v2/authenticate", data= CREDENTIALS, verify=False)

QUERY_URL=BASE_URL+"/sw-reporting/rest/v2/tenants/{0}/queries".format(TENAT_ID)

flow_data ={
    "searchName": "Flows API Search on 6/29/2019",
    "startDateTime": "2019-06-29T00:00:01Z",
    "endDateTime": "2019-06-29T23:59:59Z"
}

session.post(QUERY_URL, json=flow_data, verify=False)
```

A network operator must generate a daily flow report and learn how to act on or manipulate returned dat

a. When the operator runs the script, it returns an enormous amount of information.

Which two actions enable the operator to limit returned data? (Choose two.)

Options:

A- Add recordLimit. followed by an integer (key:value) to the flow_data.

B- Add a for loop at the end of the script, and print each key value pair separately.

C- Add flowLimit, followed by an integer (key:value) to the flow_data.

D- Change the startDateTime and endDateTime values to include smaller time intervals.

E- Change the startDate and endDate values to include smaller date intervals.

Answer:

A, B

Question 10

Question Type: DragDrop

Drag and drop the code to complete the API call to query all Cisco Stealthwatch Cloud observations. Not all options are used.

	https://example.obsrvbl.com/api/v3/

Answer: [_____] / [_____]

GET ...ons	DELETE	GET

all		all/	all

?query=all	obsrv	?query=all